

# 20 25

# WUI CERTIFIED PRODUCTS BROCHURE

PRODUCT CERTIFICATES VALID FROM 07.01.2024 TO 06.30.2025.



**FEATURING** 

WHAT IS WUI?

DIGI DOCS SHEET

DIGITAL BROCHURE ACCESS

**WUI CERTIFICATION DOCUMENTS** 

# YOUR SAFETY \*\*MATTERS\*\*\*

TO US.



### Cal Fire

The California Office of the State Fire Marshal Fire Engineering team has reviewed the technical documents for each of our products and deemed them acceptable to be included in the Cal Fire Building Materials Listing Program (BLM). Learn more at fire.ca.gov.

# The Camp Fire, 2018 When the catastrophic Camp Fire wiped out the town of Paradise, the Butte County community - the community we call home was devastated. The disaster was a severe reminder of the sheer destructive power of wildfires. All of us came together to pick up the pieces, to help those that lost in the fire, and make strides toward a safer future. For us, wildfires are personal. BUILD SMARTER - BUILD BETTER - WITH WUI-CERTIFIED LUMBER.

# INTRODUCTION

At Western Woods, we strive to deliver lumber products that offer industry-leading durability, safety, and performance. We're keenly aware that more and more people are building into the Wildland-Urban Interface (WUI) and the consequences that come with it. We take wildfires seriously, and for us, it's personal. Our team has experienced first-hand the effects of wildfires on our community. In response, our team has ambitiously pursued methods to produce lumber that offers increased survivability in environmental events such as wildfires. Whether your project is a home, a commercial structure, or a simple outbuilding, every moment your structure withstands a wildfire matters.

With that in mind, our team is proud to announce that our Premium Designs products\* have been produced to comply with the rigorous standards outlined in the WUI Products Handbook. Published by the California State Fire Marshal (SFM) as a supplemental part of the California Building Code (CBC)\*\*, the WUI Products Handbook outlines all of the products that have been reviewed by the SFM Staff and had their compliance verified based upon a thorough analysis of product performance test results and product reliability features. Every WUI-verified product is listed, and a listing number is then attached to the product.

To learn more about the visit the CalFire website at https://osfm.fire.ca.gov (or scan the QR code to the right). To complete get a listing of our WUI-compliant products, visit our website, www.westernwoodsinc.com, or turn to Page 027.



- \* Including Western Woods ENDURAWOOD™ and PROFORMAWOOD™ lumber products. Additional, non Premium Designs products, have been listed as well. See our website for details.
- \*\* WUI-Certified lumber products are now mandatory within the 2024 California Building Code (CBC).



# **WUI-CERTIFIED PRODUCTS**

001 8140-2084:0001
EXTERIOR WALL SIDING AND SHEATHING

005 8110-2084:0002 DECKING

009

8140-2084:0003

EXTERIOR WALL SIDING AND SHEATHING

**013** *8140-2084:0004* 

**EXTERIOR WALL SIDING AND SHEATHING** 

**017** *8140-2084:0005* 

**EXTERIOR WALL SIDING AND SHEATHING** 

**021** *8140-2084:0006* 

**EXTERIOR WALL SIDING AND SHEATHING** 

024 WESTERN WOODS WUI-CERTIFIED PRODUCTS

ENDURAWOOD™ AND PROFORMAWOOD™

# RESOURCES

**004** WUI // THE STATICS

THE WUI IS GROWING IN THE US. SEE THE DATA BEHIND IT.

**012** WUI // TRENDS
SEE THE TRENDS OF WUI AND THE DATA BEHIND THEM.

**020** WUI // PRODUCTS

LEARN WHY WUI PRODUCTS ARE BETTER PRODUCTS.

**O26** WESTERN WOODS BROCHURES + GUIDES
OUR LINEUP OF BROCHURES AND GUIDES TO TAKE YOUR
SUCCESS FURTHER.


027 DIGITAL DOCS

CENTRALIZED QR CODE DIRECTORY FOR ALL PRODUCTS

© 2021-2024 Western Woods, inc. All rights reserved. DOC VERSION 25.1.1

PRODUCT CERTIFICATES VALID FROM 07.01.2024 TO 06.30.2025.

0 0 1

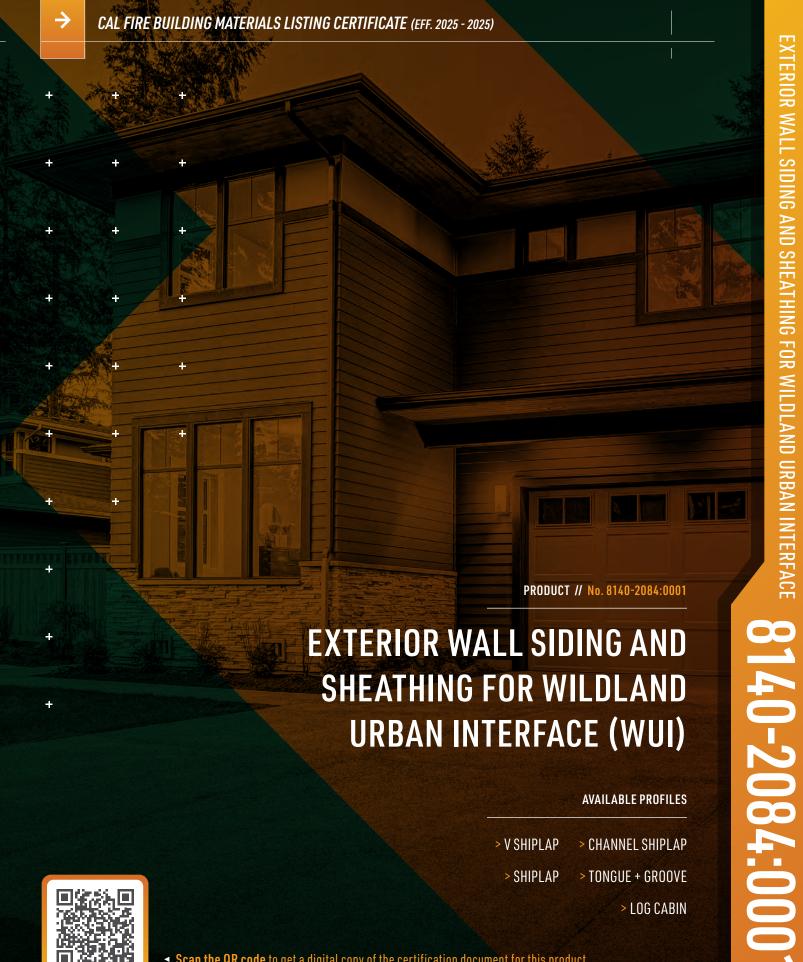

**AVAILABLE PROFILES** 

> V SHIPLAP

> CHANNEL SHIPLAP

> SHIPLAP

> TONGUE + GROOVE

> LOG CABIN



- Scan the QR code to get a digital copy of the certification document for this product.
- ► QR codes for all of our WUI-certified products may be found on PAGE 027 or at westernwoodsinc.com.



# LISTING SERVICE

LISTING No.:	8140-2084:0001	
PARENT LISTING No.:	8140-2041:0001	
CATEGORY:	8140 - EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (W.U.I)	
LISTEE:	WESTERN WOODS INC. P.O. Box 4402, Chico, CA, 95973 Contact: Yale, LInda (530) 343-5821 (530) 343-3851 Email: linday@westernwoodsinc.com	
DESIGN:	Solid-sawn "Wood" siding with no through holes or loose knots, installed over structural plywood or oriented strand board (OSB) with a 7/16" minimum thickness and complying with Voluntary Product Standard PS1 or Voluntary Product Standard PS2, with the following interlocking designs when installed in accordance with industrial technical guide. Refer to the manufacturer's installation instructions and product data sheets.  a. Tongued & Grooved, Shiplap, Channel Shiplap, V Shiplap, Log Cabin: When applied in a horizontal orientation with minimum nominal 6" wide and nominal 1" thick boards made of wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", "Alaska Yellow Cedar", "Ponderosa Pine", "Douglas Fir", "White Fir", "Western Spruce", or any other wood species having a Flame Spread Rating not greater than 150	
	(Class C) when tested in accordance with ASTM E84.  b. Tongued & Grooved, Shiplap, Channel Shiplap, V Shiplap: When applied in a vertical orientation with minimum nominal 6" wide and nominal 1" thick boards made of wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", "Alaska Yellow Cedar", "Ponderosa Pine", "Douglas Fir", "White Fir", and "Western Spruce", or any other wood species having a Flame Spread Rating not greater than 100 (Class C) when tested in accordance with ASTM E84.	
	All nominal board sizes shall comply with the applicable provisions of American Softwood Lumber Standard DOC PS 20. Edge and end glued siding is permitted to be used interchangeably with solid sawn members. The recommended installation practice for solid wood siding in wall construction regarding butt and overlapping joints is: butt joints between pieces should be staggered a minimum of 12" and all butt joints should be flush with no gap. Nail joints into the studs or blocking members. One nail at each crossing with the wood frame support member shall be used for nominal 6" siding and 2 nails for nominal 8" or wider siding.	
	Refer to the manufacturer's installation instructions and product data sheets.	
RATING:	Compliance with Chapter 7A of the California Building Code.	
INSTALLATION:	In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.	

Page 1 of 2



# LISTING SERVICE

MARKING:	Listee name. Model number, rating and SFM label.
APPROVAL:	Listed as solid wood sidings for use in the Wildland Urban Interface areas.
NOTES:	

11-23-11 bh



This listing is based upon technical data submitted by the applicant. OSFM Fire Engineering staff has reviewed the test resultsand/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other suitable information sources.

Date Issued: 06/21/2024 Listing Expires: 06/30/2025

Authorized By: **David Castillo**, Program Coordinator Fire Engineering & Investigations Division

8140-2084:000

# BY THE NUMBERS: WUISTATISTICS



The WUI is the fastest growing land use type in the United States.



97% of new WUI land was due to new home construction



1 in 3 homes in the U.S. are located in the WUI.




Wildfires are more frequent, more intense, & are burning 2x longer.\*



80 million properties are at 'significant wildfire risk' in the WUI.

SOURCE 1: "Fueling the Flames." First Street Foundation. May 16, 2022. www.firststreet.org | SOURCE 2: "The Wildland-Urban Interface: The Problem, Trends, & Solutions." Headwater Economics. August 31, 2018. www.headwatereconomicst.org

TO LEARN MORE ABOUT WUI, VISIT THE CALIFORNIA OFSM WEBSITE: https://osfm.fire.ca.gov

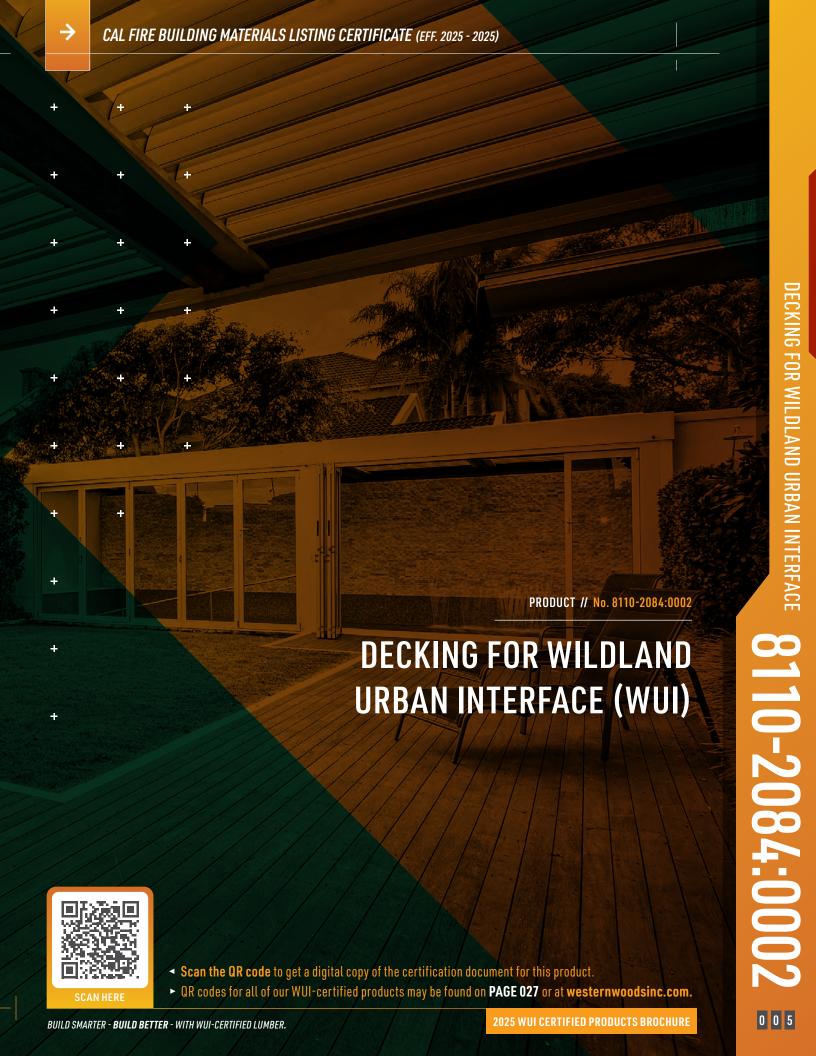

8110-2084:0002 | DECKING



# CALIFORNIA DEPARTMENT OF FORESTRY & FIRE PROTECTION OFFICE OF THE STATE FIRE MARSHAL FIRE ENGINEERING & INVESTIGATIONS DIVISION BUILDING MATERIALS LISTING PROGRAM

# LISTING SERVICE

LISTING No.:	8110-2084:0002	
PARENT LISTING No.:	8110-2041:0002	
CATEGORY:	8110 - DECKING FOR WILDLAND URBAN INTERFACE (W.U.I)	
LISTEE:	WESTERN WOODS INC. P.O. Box 4402, Chico, CA, 95973 Contact: Yale, LInda (530) 343-5821 (530) 343-3851 Email: linday@westernwoodsinc.com	
DESIGN:	Solid "Wood" decking, when installed over minimum 2" x 6" solid "Douglas Fir" or better joists, spaced 24" or less on center, and decking and joists complying with American Softwood Lumber Standard PS 20 as follows:  Minimum nominal 5/4" thick and nominal 6" wide decking boards with a maximum 3/8" radius edges made of solid wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", or "Alaska Yellow Cedar" having a Class B Flame Spread rating when tested in accordance with ASTM E84. Lumber grades: construction common, commercial or better grades for Redwood; 3 common, commercial or better grades for Cedars.  Refer to the manufacturer's installation instructions and product data sheets.	
RATING:	Class B Flame Spread	
INSTALLATION:	In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.	
MARKING:	Listee name. Model number, rating and SFM label.	
APPROVAL:	Listed as solid wood decking materials for use in the Wildland Urban Interface areas.	
NOTES:		

Page 1 of 2





# LISTING SERVICE

11-23-11 bh



This listing is based upon technical data submitted by the applicant. OSFM Fire Engineering staff has reviewed the test resultsand/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other suitable information sources.

Date Issued: 06/21/2024 Listing Expires: 06/30/2025

Authorized By: **David Castillo**, Program Coordinator Fire Engineering & Investigations Division

# WESTERN WOODS, WE OFFER: SHEATHING DECKING SIDING **ENDURAWOOD**<sup>™</sup> PROFORMAWOOD

Call us today to learn more.

SOURCE 1: "Fueling the Flames." First Street Foundation. May 16, 2022. www.firststreet.org | SOURCE 2: "The Wildland-Urban Interface: The Problem, Trends, & Solutions." Headwater Economics. August 31, 2018. www.headwatereconomicst.org

8140-2084:0003 | SIDING





# **CALIFORNIA DEPARTMENT OF FORESTRY & FIRE PROTECTION** OFFICE OF THE STATE FIRE MARSHAL FIRE ENGINEERING & INVESTIGATIONS DIVISION **BUILDING MATERIALS LISTING PROGRAM**

# LISTING SERVICE

LISTING No.:	8140-2084:0003
PARENT LISTING No.:	8140-2041:0003
CATEGORY:	8140 - EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (W.U.I)
LISTEE:	WESTERN WOODS INC. P.O. Box 4402, Chico, CA, 95973 Contact: Yale, LInda (530) 343-5821 (530) 343-3851 Email: linday@westernwoodsinc.com
DESIGN:	Solid-sawn "Wood" siding with no through holes or loose knots, installed over structural plywood or oriented strand board (OSB) with a 7/16" minimum thickness and complying with Voluntary Product Standard PS1 or Voluntary Product Standard PS2, with the following interlocking designs when installed in accordance with industrial technical guide. Refer to the manufacturer's installation instructions and product data sheets.
	a. Tongued & Grooved, Shiplap, V Shiplap (Edge Vee One Side): When applied in a horizontal orientation with minimum nominal 4" wide and nominal 1" thick boards made of wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", "Alaska Yellow Cedar", or any other wood species having a Flame Spread Rating not greater than 75 (Class B) when tested in accordance with ASTM E84. An additional face nail is to be added and shall be placed on the face, approximately 1" from the groove edge for T&G or overlapping edge for shiplap designs.
	b. Tongued & Grooved, Shiplap, Channel Shiplap, V Shiplap (Edge Vee One Side): When applied in a vertical orientation with minimum nominal 4" wide and nominal 1" thick boards made of wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", "Alaska Yellow Cedar", or other wood species having a Flame Spread Rating not greater than 75 (Class B) when tested in accordance with ASTM E84. An additional face nail is to be added and shall be placed on the face, approximately 1" from the groove edge for the Tongue & Grove or overlaping edge for shiplap designs.
	All nominal board sizes shall comply with the applicable provisions of American Softwood Lumber Standard DOC PS 20. Edge and end glued siding is permitted to be used interchangeably with solid sawn members. The recommended installation practice for solid wood siding in wall construction regarding butt and overlapping joints is: butt joints between pieces should be staggered a minimum of 12" and all butt joints should be flush with no gap. Nail joints into the studs or blocking members. One nail at each crossing with the wood frame support member shall be used for nominal 6" siding and 2 nails for nominal 8" or wider siding. Refer to the manufacturer's installation instructions and product data sheets.
RATING:	Compliance with Chapter 7A of the California Building Code.

Page 1 of 2

8140-2084:0003 | SIDING



# **CALIFORNIA DEPARTMENT OF FORESTRY & FIRE PROTECTION** OFFICE OF THE STATE FIRE MARSHAL FIRE ENGINEERING & INVESTIGATIONS DIVISION **BUILDING MATERIALS LISTING PROGRAM**

### LISTING SERVICE

INSTALLATION:	In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.
MARKING:	Listee name. Model number, rating and SFM label.
APPROVAL:	Listed as solid wood sidings for use in the Wildland Urban Interface areas.
NOTES:	

11-23-11 bh




This listing is based upon technical data submitted by the applicant. OSFM Fire Engineering staff has reviewed the test resultsand/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria.Refer to listee's data sheet, installation instructions and/or other suitable information sources.

Listing Expires: 06/30/2025 Date Issued: 06/21/2024


Authorized By: David Castillo, Program Coordinator Fire Engineering & Investigations Division



# IT IS RAPIDLY EXPANDING ACROSS THE UNITED STATES.

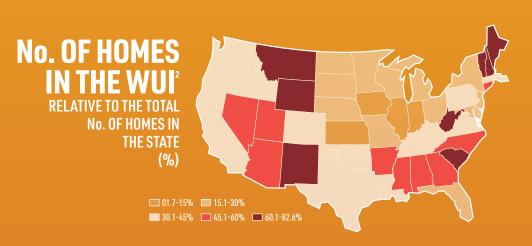



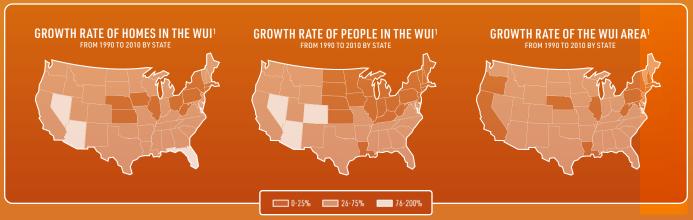

SOURCE 1: "Rapid growth of the US wildland-urban interface raises wildfire risk." PNAS. February 6, 2018. www.pnas.org | SOURCE 2: "What is the WUI?" U.S. Forest Service + U.S. Fire Administration. Date unknown. www.usfa.fema.or

TO LEARN MORE ABOUT WUI, VISIT THE CALIFORNIA OFSM WEBSITE: https://osfm.fire.ca.gov



# EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (WUI)

**AVAILABLE PROFILES** 

PRODUCT // No. 8140-2084:0004

> RABBETED BEVEL



- Scan the QR code to get a digital copy of the certification document for this product.
- ► QR codes for all of our WUI-certified products may be found on PAGE 027 or at westernwoodsinc.com.

2025 WUI CERTIFIED PRODUCTS BROCHURE



# LISTING SERVICE

LISTING No.:	8140-2084:0004	
PARENT LISTING No.:	8140-2041:0004	
CATEGORY:	8140 - EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (W.U.I)	
LISTEE:	WESTERN WOODS INC. P.O. Box 4402, Chico, CA, 95973 Contact: Yale, LInda (530) 343-5821 (530) 343-3851 Email: linday@westernwoodsinc.com	
DESIGN:	Solid-sawn "Wood" siding with no through holes or loose knots, installed over structural plywood or oriented strand board (OSB) with a 7/16" minimum thickness and complying with Voluntary Product Standard PS1 or Voluntary Product Standard PS2, with the following interlocking designs when installed in accordance with industrial technical guide. Refer to the manufacturer's installation instructions and product data sheets.	
	Rabbeted Bevel: When applied in a horizontal orientation with minimum nominal 6" wide and nominal 1" thick boards made of a wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", "Alaska Yellow Cedar", or any other wood species having a Flame Spread Rating not greater than 75 (Class B) when tested in accordance with ASTM E84.	
	All nominal board sizes shall comply with the applicable provisions of American Softwood Lumber Standard DOC PS 20. Edge and end glued siding is permitted to be used interchangeably with solid sawn members. The recommended installation practice for solid wood siding in wall construction regarding butt and overlapping joints is: butt joints between pieces should be staggered a minimum of 12" and all butt joints should be flush with no gap. Nail joints into the studs or blocking members. One nail at each crossing with the wood frame support member shall be used for nominal 6" siding and 2 nails for nominal 8" or wider siding. Refer to the manufacturer's installation instructions and product data sheets.	
RATING:	Compliance with Chapter 7A of the California Building Code.	
INSTALLATION:	In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.	
MARKING:	Listee name. Model number, rating and SFM label.	
APPROVAL:	Listed as solid wood sidings for use in the Wildland Urban Interface areas.	

Page 1 of 2



# LISTING SERVICE

NOTES:		

11-23-11bh



This listing is based upon technical data submitted by the applicant. OSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other suitable information sources.

Listing Expires: 06/30/2025 Date Issued: 06/21/2024

Authorized By: David Castillo , Program Coordinator Fire Engineering & Investigations Division

# BUILD SMARTER. BUILD BETTER. IT'S NOW CODE.\*

Starting in California. Refer to the 2022 California Building Code, Title 24, Section 7A.

\* SOURCE 1: California Building Code 2022. Section 7A. https://www.dgs.ca.gov/en/BSC/Resources/2022-Title-24-California-Code-Changes/Part-2-Chapter-7A-Materials-and-Construction-Method

TO LEARN MORE ABOUT WUI, VISIT THE CALIFORNIA OFSM WEBSITE: https://osfm.fire.ca.gov

# **EXTERIOR WALL SIDING AND** SHEATHING FOR WILDLAND **URBAN INTERFACE (WUI)**

**AVAILABLE PROFILES** 

PRODUCT // No. 8140-2084:0005

> BOARD + BATTEN



- Scan the QR code to get a digital copy of the certification document for this product.
- ► QR codes for all of our WUI-certified products may be found on PAGE 027 or at westernwoodsinc.com.

2025 WUI CERTIFIED PRODUCTS BROCHURE



# LISTING SERVICE

LISTING No.:	8140-2084:0005	
PARENT LISTING No.:	8140-2041:0005	
CATEGORY:	8140 - EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (W.U.I)	
LISTEE:	WESTERN WOODS INC. P.O. Box 4402, Chico, CA, 95973 Contact: Yale, LInda (530) 343-5821 (530) 343-3851 Email: linday@westernwoodsinc.com	
DESIGN:	Solid-sawn "Wood" siding with no through holes or loose knots, installed over structural plywood or oriented strand board (OSB) with a 7/16" minimum thickness and complying with Voluntary Product Standard PS1 or Voluntary Product Standard PS2, with the following interlocking designs when installed in accordance with industrial technical guide. Refer to the manufacturer's installation instructions and product data sheets.	
	Board and Batten: When applied in a vertical orientation with minimum nominal 8" wide and nominal 1" thick boards, and minimum nominal 4" wide and nominal 1-1/4" thick battens, with boards installed with a gap not more than ½", with battens fastened to the wood frame with not less than 3" long fasteners at a schedule not more than 24" on center, and boards and battens made of a wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", "Alaska Yellow Cedar", or any other wood species having a Flame Spread Rating not greater than 75 (Class B) when tested in accordance with ASTM E84.	
	All nominal board sizes shall comply with the applicable provisions of American Softwood Lumber Standard DOC PS 20. Edge and end glued siding is permitted to be used interchangeably with solid sawn members. The recommended installation practice for solid wood siding in wall construction regarding butt and overlapping joints is: butt joints between pieces should be staggered a minimum of 12" and all butt joints should be flush with no gap. Nail joints into the studs or blocking members. One nail at each crossing with the wood frame support member shall be used for nominal 6" siding and 2 nails for nominal 8" or wider siding. Refer to the manufacturer's installation instructions and product data sheets.	
RATING:	Compliance with Chapter 7A of the California Building Code.	
INSTALLATION:	In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.	
MARKING:	Listee name. Model number, rating and SFM label.	

Page 1 of 2



# LISTING SERVICE

APPROVAL:	Listed as solid wood sidings for use in the Wildland Urban Interface areas.
NOTES:	

11-23-11 bh



This listing is based upon technical data submitted by the applicant. OSFM Fire Engineering staff has reviewed the test resultsand/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria.Refer to listee's data sheet, installation instructions and/or other suitable information sources.

Listing Expires: 06/30/2025 Date Issued: 06/21/2024


Authorized By: David Castillo, Program Coordinator Fire Engineering & Investigations Division

# WUI-CERTIFIED PRODUCTS EQUAL BETTER PRODUCTS.

WUI-Certified lumber products burn more slowly in the event of a fire, giving occupants the additional time they need to get what matters most out and to safety.

SOURCE 1: "Fueling the Flames." First Street Foundation. May 16, 2022. www.firststreet.org | SOURCE 2: "The Wildland-Urban Interface: The Problem, Trends, & Solutions." Headwater Economics. August 31, 2018. www.headwatereconomicst.org

TO LEARN MORE ABOUT WUI. VISIT THE CALIFORNIA OFSM WEBSITE: https://osfm.fire.ca.gov



# **EXTERIOR WALL SIDING AND** SHEATHING FOR WILDLAND **URBAN INTERFACE (WUI)**

**AVAILABLE PROFILES** 

> BOARD ON BOARD



- Scan the QR code to get a digital copy of the certification document for this product.
- ► QR codes for all of our WUI-certified products may be found on PAGE 027 or at westernwoodsinc.com.



# LISTING SERVICE

LISTING No.:	8140-2084:0006
PARENT LISTING No.:	8140-2041:0008
CATEGORY:	8140 - EXTERIOR WALL SIDING AND SHEATHING FOR WILDLAND URBAN INTERFACE (W.U.I)
LISTEE:	WESTERN WOODS INC. P.O. Box 4402, Chico, CA, 95973 Contact: Yale, LInda (530) 343-5821 (530) 343-3851 Email: linday@westernwoodsinc.com
DESIGN:	Solid-sawn "Wood" siding with no through holes or loose knots, installed over structural plywood or oriented strand board (OSB) with a 7/16" minimum thickness and complying with Voluntary Product Standard PS1 or Voluntary Product Standard PS2, with the following interlocking designs when installed in accordance with industrial technical guide. Refer to the manufacturer's installation instructions and product data sheets.
	Board on Board: When applied in a vertical orientation with minimum nominal 8" wide and nominal 1" thick boards, and 3/4" thick x 3-1/2" wide plywood inserts between boards, with boards and plywood inserts installed with a gap not more than 1/8" between them and fastened to the wood frame with not less than 3" long fasteners at a schedule not more than 24" on center, and boards made of a wood species "Redwood", "Western Red Cedar", "Incense Cedar", "Port Orford Cedar", "Alaska Yellow Cedar", or any other wood species having a Flame Spread Rating not greater than 75 (Class B) when tested in accordance with ASTM E84.
	All nominal board sizes shall comply with the applicable provisions of American Softwood Lumber Standard DOC PS 20. Edge and end glued siding is permitted to be used interchangeably with solid sawn members. The recommended installation practice for solid wood siding in wall construction regarding butt and overlapping joints is: butt joints between pieces should be staggered a minimum of 12" and all butt joints should be flush with no gap. Nail joints into the studs or blocking members. One nail at each crossing with the wood frame support member shall be used for nominal 6" siding and 2 nails for nominal 8" or wider siding. Refer to the manufacturer's installation instructions and product data sheets.
RATING:	Compliance with Chapter 7A of the California Building Code.
INSTALLATION:	In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.
MARKING:	Listee name. Model number, rating and SFM label.

Page 1 of 2



# LISTING SERVICE

APPROVAL:	Listed as solid wood sidings for use in the Wildland Urban Interface areas.
NOTES:	

11-23-11 bh



This listing is based upon technical data submitted by the applicant. OSFM Fire Engineering staff has reviewed the test resultsand/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other suitable information sources.

Date Issued: 06/21/2024 Listing Expires: 06/30/2025

Authorized By: **David Castillo** , Program Coordinator Fire Engineering & Investigations Division

Page 2 of 2



WESTERN WOODS PREMIUM FIR AND PINE PATTERNS + TRIM

At Western Woods we do not believe affordable building material should translate into sub-standard quality or performance. With Western Woods **ENDURA**WOOD™ **Premium Patterns + Trim** you will find a great wood product that strikes the right balance of strength, value, and quality appearance without breaking your budget.

### **PRODUCT HIGHLIGHTS**

- Easily works with both hand and with power tools.
- ► Available with primed, stained, or a natural finish.
- ► Great for both indoor and outdoor projects.
- ► Available in both White Fir and Pine.
- ► Numerous pattern and finish options.

### **RECOMMENDED APPLICATIONS**





Cornerboard













Siding



Decking

**CERTIFIED** 

 $\mathbf{ENDURAWOOD^{TM}}$ 

 $PROFORMAWOOD^{TM}$ 

# LUMBER WORTHY OF TURNING YOUR PROJECT INTO A MASTERPIECE.

### Truly Awe-Inspiring

PROFORMAWOOD™ is made of top quality Western Red Cedar, delivering unparalleled versatility, performance, and beauty to any build project.

### **AVAILABLE OPTIONS**



Motural

Will lose its color and silver over time.



Stained

You choose your color & finish.



Primed

StainBlock is applied for the top coat application.



Interior/Exterior

Both exterior & interior options available.



WWPA Patterns

WWPA Standard Patterns available upon request.



**Custom Patterns** 

Custom patterns available upon request.

# **PROFORMA**WOOD\*\*

WESTERN WOODS PREMIUM WESTERN RED CEDAR PATTERNS + TRIM

Boasting a core of Western Red Cedar that produces nearly twice the stability of many other softwoods, our **PROFORMAWOOD™ Premium**Western Red Cedar Patterns + Trim delivers the professional grade longevity, performance, and aesthetics you need to make your next building project a success.

### PRODUCT HIGHLIGHTS

- ► Boasts a strong natural resistance to moisture, decay, & insect damage.
- Easy to cut, saw, & nail thanks to a smooth, straight grain.
- Firmly grips onto paint and stains.
- ► Provides great style & performacne.
- Great for a variety of both indoor and outdoor projects.

# WE HAVE WHAT YOU NEED FOR SUCCESS.

# **PRODUCT &** SERVICES BROCHURE

SERVICE INTROS | SUSTAINABILITY OUTLINE



**SCAN HERE** 

# LUMBER PATTERN BOOK



THE LUMBER
PATTERN BOOK

DIAGRAMS FOR 70+ PATTERNS | INSTALLATION



LUMBER PATTERN DATA SHEETS

OPTIONS | INSTALLATION INSTRUCTIONS



**PRODUCT** LINE CARD

PRODUCT SIZING | FINISH + PATTERN OPTIONS | DIGITAL DOCUMENT ACCESS

GET THESE AND MORE AT WESTERNWOODSINC.COM.

**SCAN HERE** 

# DIGITAL CERTIFICATE **ACCESS**

To get a digital copy of our WUI Certification documentation for easy print or distribution, simply scan the QR Codes below. If you have any questions about our WUI-certified products, please call a member of our knowledgeable sales team at (800) 824-4100 or visit westernwoodsinc.com.

8140-2084:0001 WALL SHEATING | PG 001



8140-2084:0004 WALL SHEATING | PG 013



8110-2084:0002 DECKING | PG 005



8140-2084:0005 WALL SHEATING | PG 017



8140-2084:0003



8140-2084:0006







CALL US

**Tel** (800) 824-4100

**Fax** (800) 894-8601

**FIND US ONLINE:** 

www.westernwoodsinc.com

info@westernwoodsinc.com

# **GET A DIGITAL COPY**

Get your digital copy of this Pattern Book by scanning the QR Code below. It is convenient for access anytime, anywhere and for sharing with your clients and associates.

### LETS GET SOCIAL

Scan the QR Codes below and join us on LinkedIn and Facebook. Check out our feed on Instagram @westernwoodsinc to learn about our products and services, to meet our team, and to find some inspiration for your next project.

### **LUMBER PATTERN DATA SHEETS**

Get access to our exclusive Lumber Pattern Data Sheet digital catalog by scanning the QR Code. Working smarter, working better starts now.

### SIGN UP FOR OUR NEWSLETTER

Scan the QR code below to stay up to date with the latest product announcements, news, and events happening here at Western Woods.

SCAN HERE
TO VIEW OUR
AWESOME
DIGITAL GUIDES
& RESOURCES.













QR SCANNING TIP: Hold your device 4" - 6" away from back of this Pattern Book for quick and easy scanning.